


REFLECTIVE SERIES | R50 SR CDF (Silver)

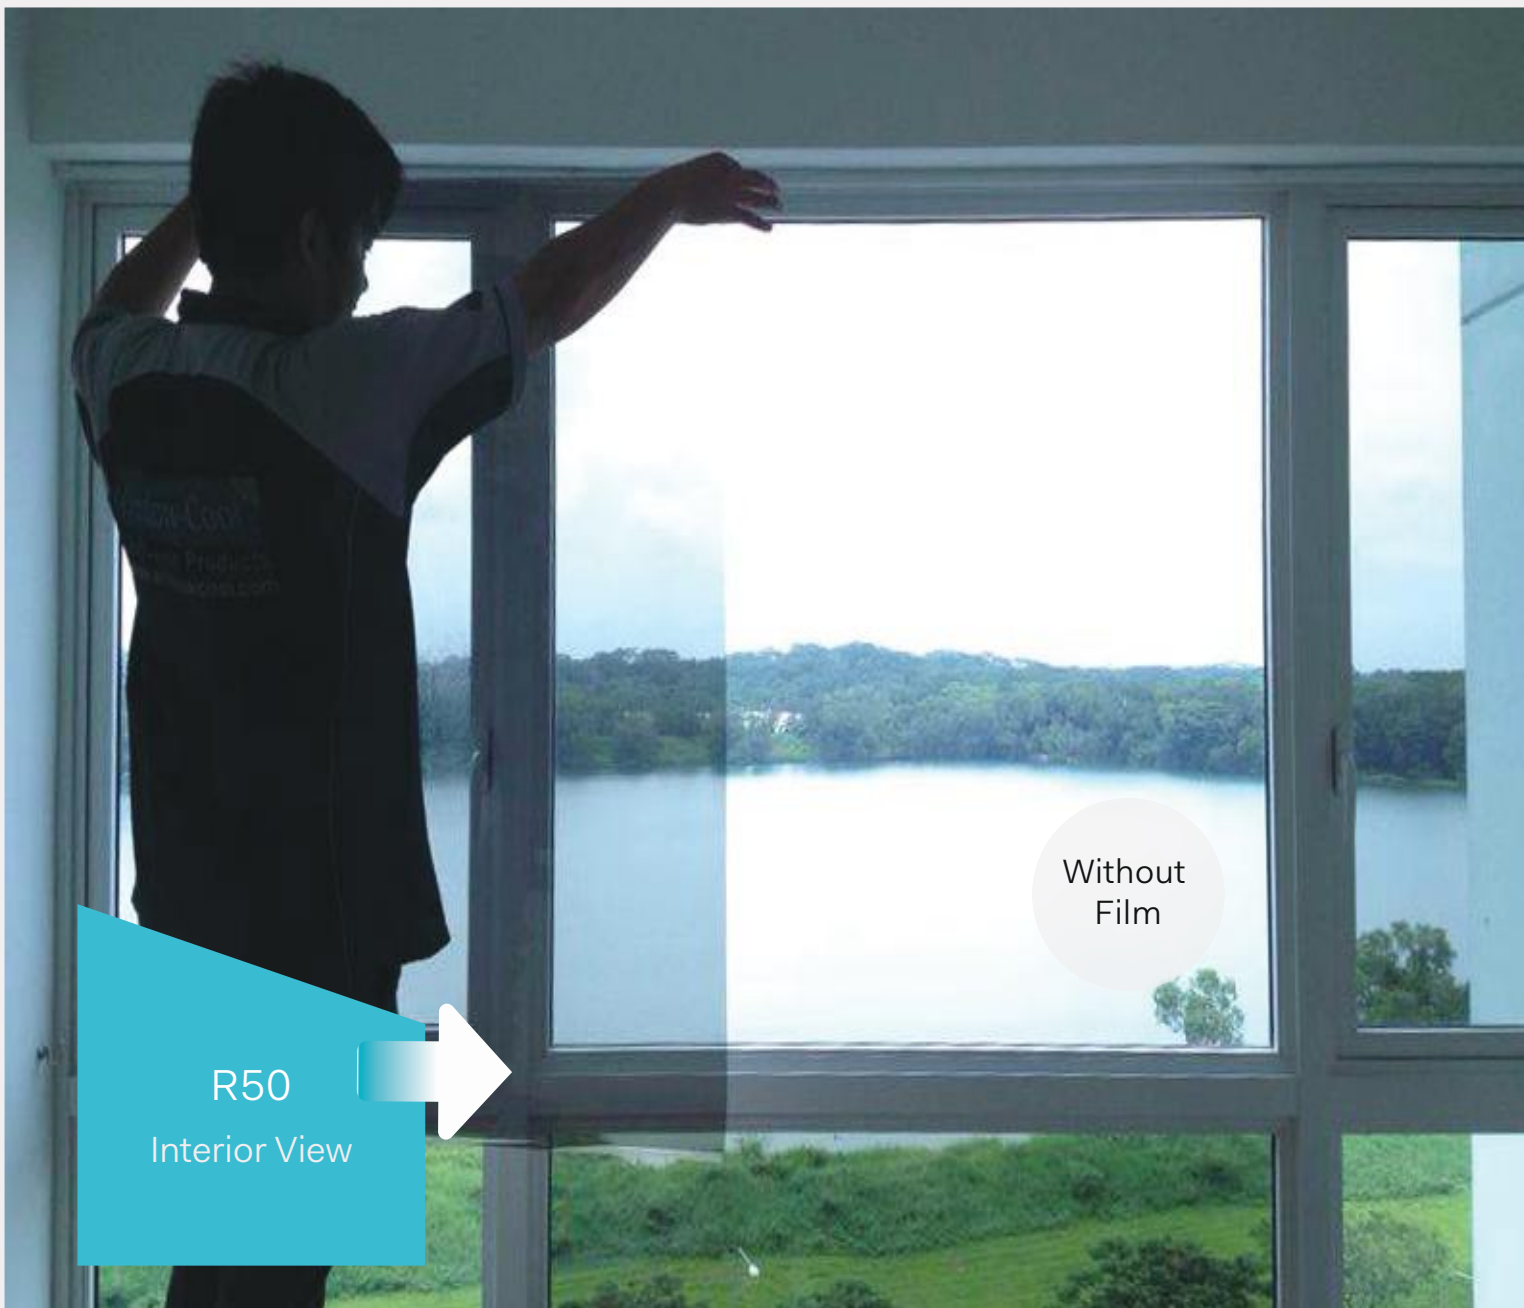

Without Film

R50
Interior View

PERFORMANCE DATA

Visible Light Transmittance	48 %
Total Solar Energy Rejected	54 %
Ultraviolet Rejected	99 %

TECHNICAL DEFINITIONS

Visible Light Transmittance

The percentage of visible light that passes directly through filmed glass.

Total Solar Energy Rejected

The percentage of total solar energy rejected by filmed glass.

Ultraviolet Rejected

The percentage of ultraviolet light that is rejected by filmed glass.

Window Film Viewer

www.windowcool.com

Window Tinting Service | LLumar Singapore